

advanced FLOW engineering

Instruction Manual P/N: 77-43016

Make: **Ford** Model: **F-150 EcoBoost** Year: **2015-2016** Engine: **V6-3.5L (tt)**



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- If you are missing any of the components, call customer support at 951-493-7100.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Disconnect the negative battery terminal before proceeding.
- Retain factory parts for future use.

Label	Qty.	Description	Part Number
A	1	Module	R77-43016
B	1	LED Switch	05-70005
C	2	Velcro (2 Inches)	05-01244
D	4	Cable Ties	05-60167

Note: Legal in California for use on race vehicles only. The use of this device on vehicles used on public streets or highways is strictly prohibited in California and others states that have adopted California emission regulations.





Refer to Figure A for Step 1.

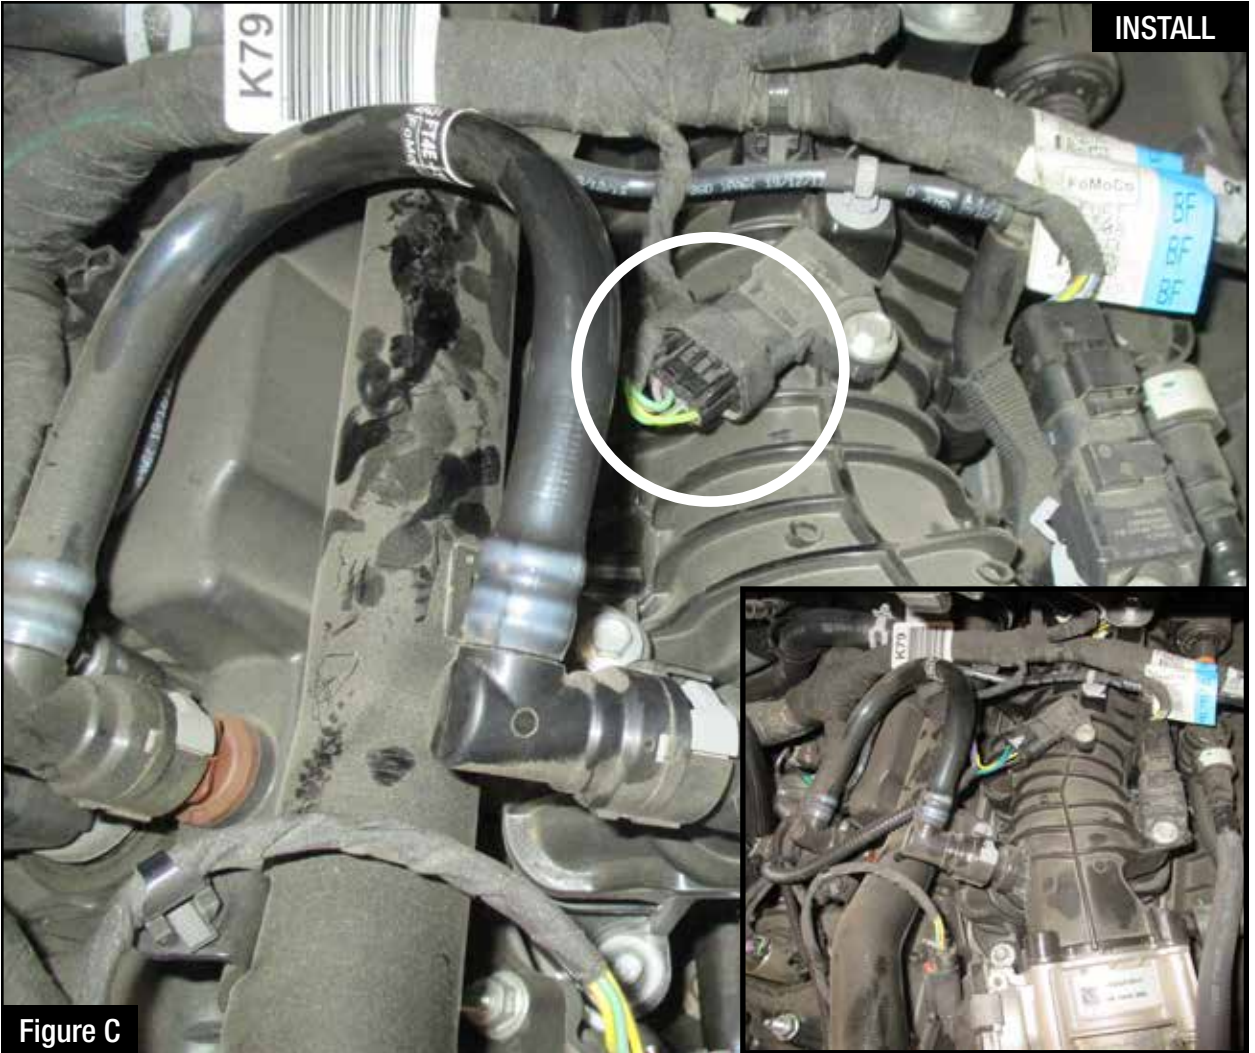
Step 1: With a pulling motion remove the engine cover out of the vehicle.



Figure B

Refer to Figure B for Step 2.

Step 2: Locate the MAP ① and TMAP sensor ②. The MAP sensor is located on the top of the intake manifold next to a set of wires, the TMAP sensor is located in front of the throttle body on the charge pipe.

**Figure C****Refer to Figures C for Steps 3-4.**

Step 3: Disconnect the MAP sensor.

Step 4: Locate the MAP sensor jumper harness on the aFe module. This is the shorter harness with a Purple and Black connector. Plug the male connector of the module to the stock map sensor, then the female connector of the module male connector of the engine harness.

Note: Make sure connections are fully engaged. Usually, connectors make a snapping sound when fully.

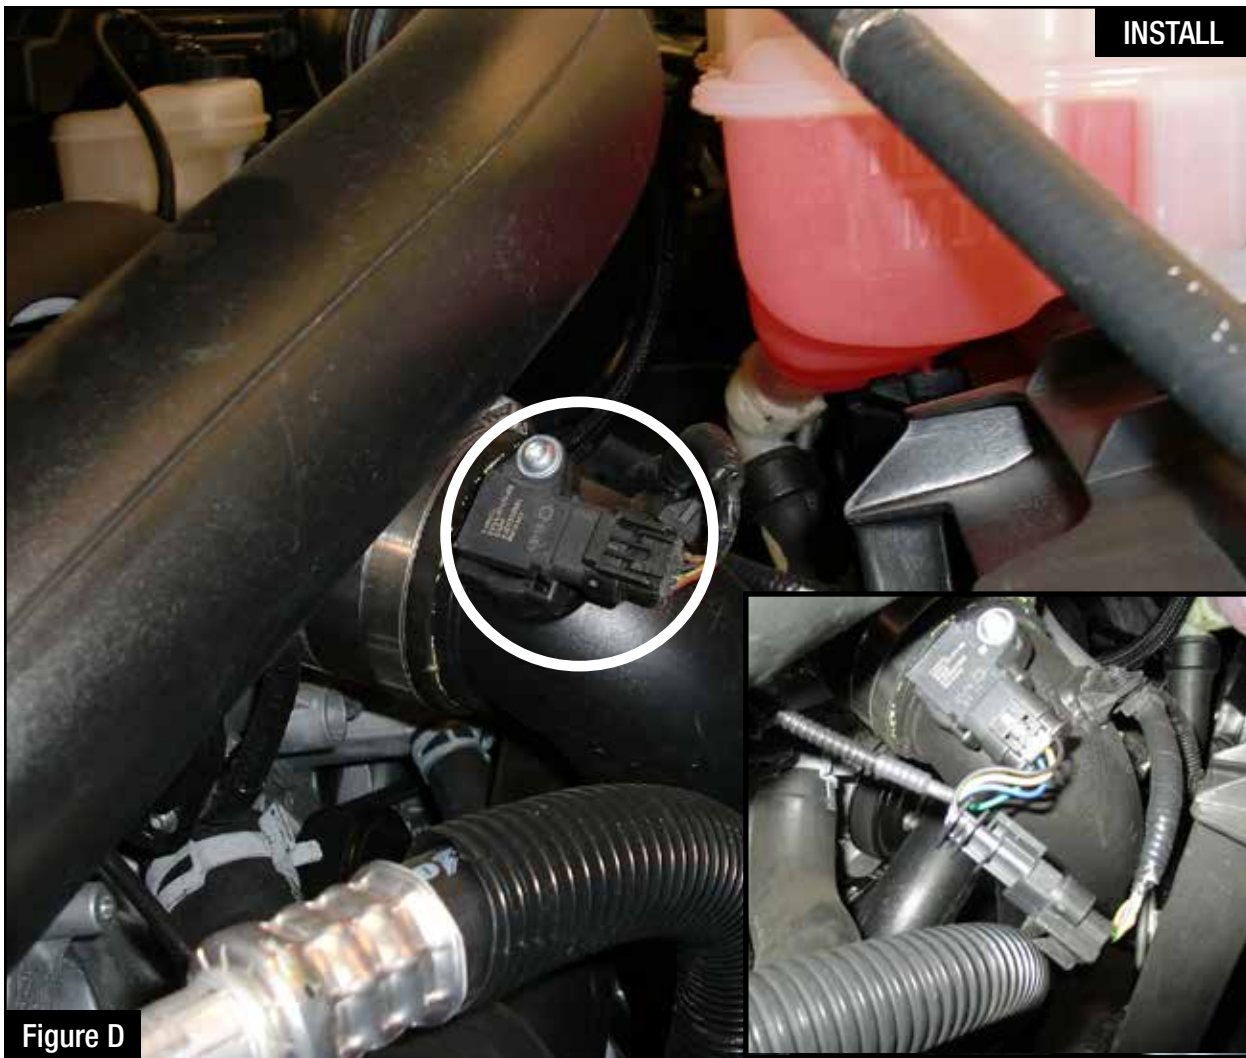


Figure D

Refer to Figure D for Steps 5-6.

Step 5: Locate and disconnect the TMAP sensor.

Step 6: Locate the fuel pressure sensor jumper harness on the aFe module. This is the longer harness with an Orange and Blue connector. Plug the male connector of the module to the stock fuel pressure sensor, then take the female connector of the module and connect to the male connector of the engine harness.



Refer to Figure F for Step 9.

Step 9: Route the switch cable through firewall and into the engine bay. Follow the main harness through the grommet into the firewall. Plug the end of the cable to the module.



Figure G

Refer to Figure G for Steps 10-11.

Step 10: Mount the module in a safe location, using the supplied Velcro strip. Then, secure the wires and module away from any extreme heat and moving parts, with the provided ties. Make sure all connections are secured and fully engaged.

Step 11: Re-install your engine cover.



Figure H

Refer to Figure H for Step 12.


Step 12: When turning on the vehicle, the switch will go through the light. It will stop at its last setting.

The LED on the switch represents the different level of power.

- Green LED: Stock
- Yellow LED: Sport
- Orange LED: Sport+
- Red LED: Race

Use the grey button to select the desired setting. Power adjustments can be done at any moment.

Thank you for choosing aFe POWER!

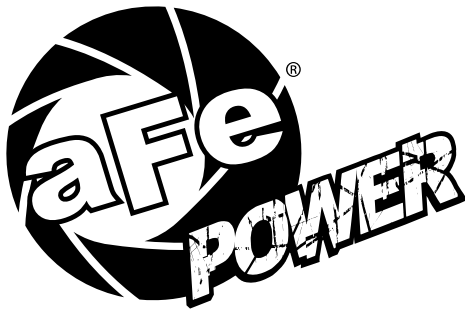

advanced FLOW engineering, inc.
252 Granite Street Corona, CA 92879